



Peripheral Vision (Technology) Ltd
Unit 4, Zephyr House
Calleva Park
Aldermaston
RG7 8JN
UK


Tel: + 44 (0)118 982 0432
Fax: + 44 (0)118 982 0426

USB to SCSI Adapter

Connect a USB
Stick to a SCSI
BUS



Peripheral Visions **USB2SCSI** pcb allows a USB Mass Storage Class Flash Card or Thumb drive to be attached to a regular SCSI bus. It will be typically be seen as a removable SCSI drive by the Host Computer.

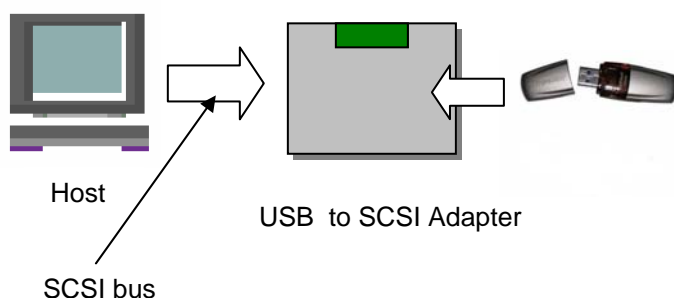

Plug the USB drive into the PV adapter . The USB drive is seen as a SCSI disk device to the Host

- Small format PCB converts USB Flash Media to appear as a SCSI device on a Host's SCSI bus.
- The SCSI Host will typically see the device as a removable disk drive.
- Write protect feature.—over and above that on the Flash device.
- Board is low power, using 5V only, and has an LCD display and pushbutton as a user interface.
- Supports 2.0 USB.

Specifications **USB2SCSI**

Board size: 115mm x 120mm.

Power: 5 Volts only @ 1.2 Watt (Typical) + PCMCIA adapter requirement.

Power connector: Mini Floppy type

LCD Display: 2X16 backlit display with push button (mounted externally) for SCSI set-up , real time activity display and real-time diagnostics.

RS232 Serial Port for microcode load and real time diagnostics .

Contact: sales@peripheral-vision.com